

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

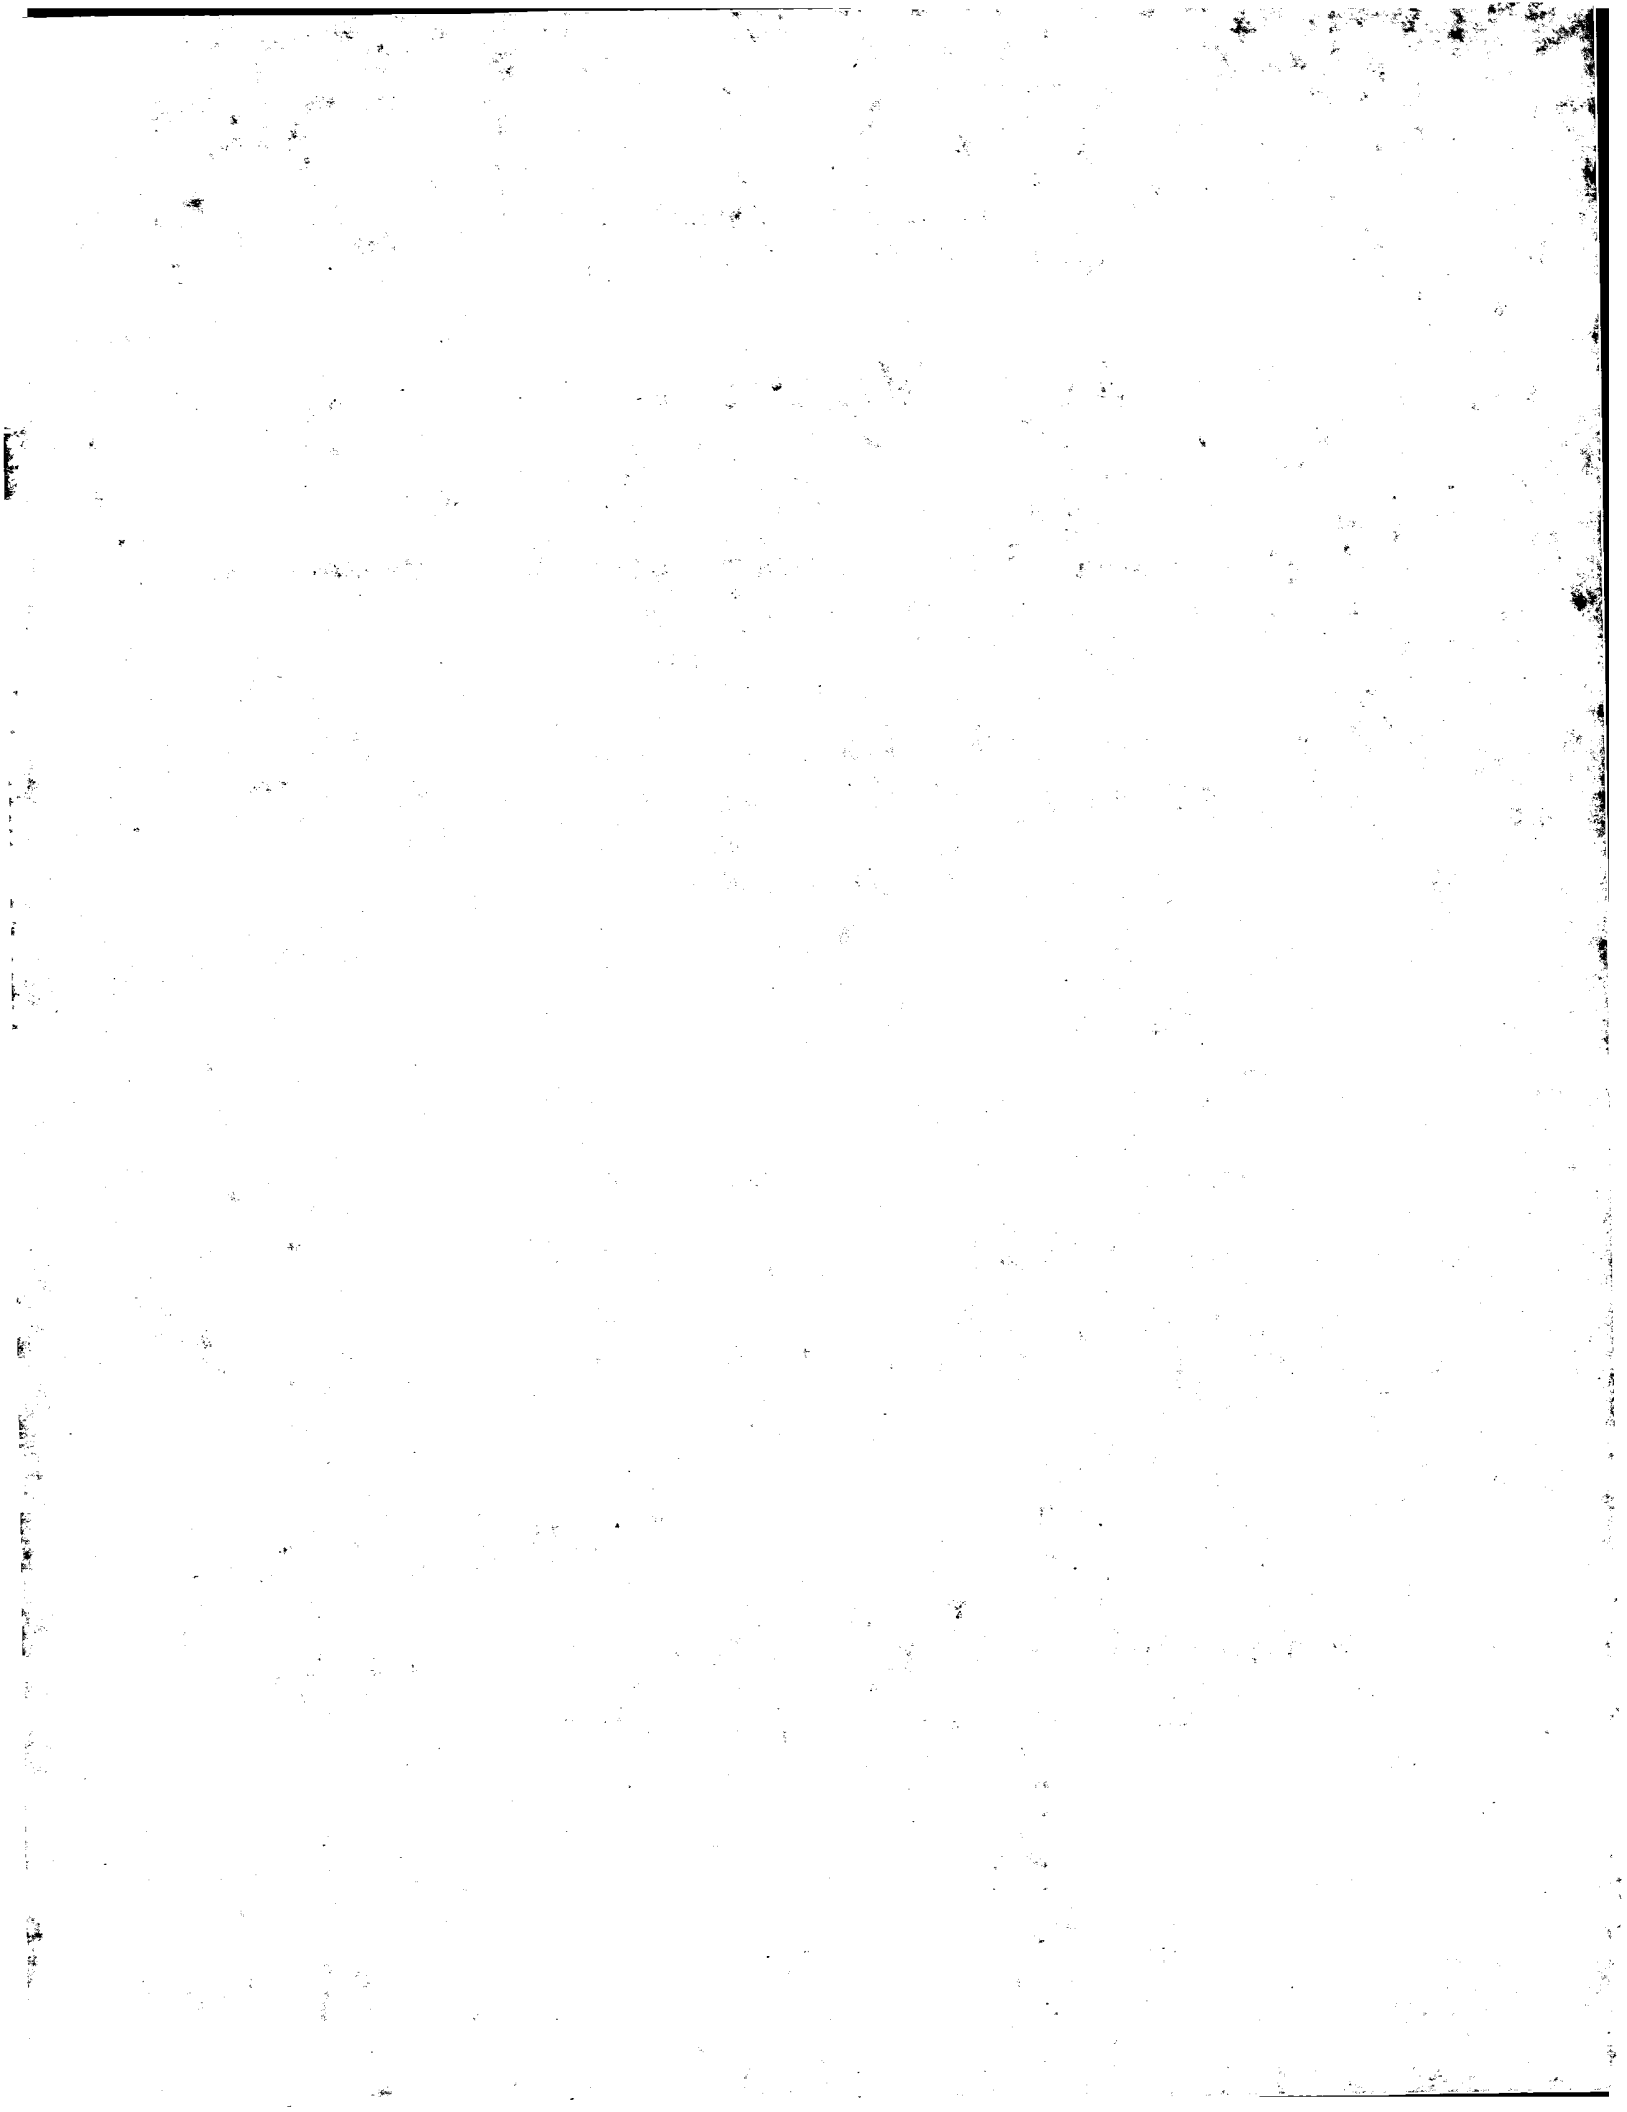

# (12) UK Patent Application (19) GB (11) 2 367 720 (13) A

(43) Date of A Publication 10.04.2002

(21) Application No 0024231.3

(22) Date of Filing 04.10.2000

(71) Applicant(s)

Hewlett-Packard Company  
(Incorporated in USA - Delaware)  
3000 Hanover Street, Palo Alto, California 94304,  
United States of America

(72) Inventor(s)

Barry Allen Thomas Brown

(74) Agent and/or Address for Service

Hewlett-Packard Limited  
Intellectual Property Section, Filton Road,  
Stoke Gifford, BRISTOL, BS34 8QZ, United Kingdom

(51) INT CL<sup>7</sup>

H04Q 7/38 // H04B 7/26 , H04Q 7/22 7/32

(52) UK CL (Edition T )

H4L LDDDM

(56) Documents Cited

GB 2329794 A  
EP 0880296 A1  
JP 110007564 A  
JP 2000287274 A  
GB 2317302 A  
DE 019653845 A1  
JP 100174165 A


(58) Field of Search

UK CL (Edition S ) H4L LDDDM  
INT CL<sup>7</sup> G07C 9/00 , H04B 1/00 1/38 1/44 7/26 , H04M  
1/00 3/42 3/50 , H04Q 7/18 7/22 7/28 7/30 7/32 7/38  
Online: WPI EPODOC JAPIO

(54) Abstract Title

**Method and apparatus for disabling mobile telephones within a controlled area and re-activating them when they leave that area**


(57) A system for disabling mobile telephones in circumstances where their use would prejudice the operation of critical systems (e.g. on an aeroplane, or in a hospital), or would irritate others includes a pair of RF beacons situated at the entrance to the controlled zone. The phone has receivers sensitive to the beacon outputs, and is adapted automatically to shut down into a standby state when passing in one direction through the beacons, and to re-activate when passing in the other direction.

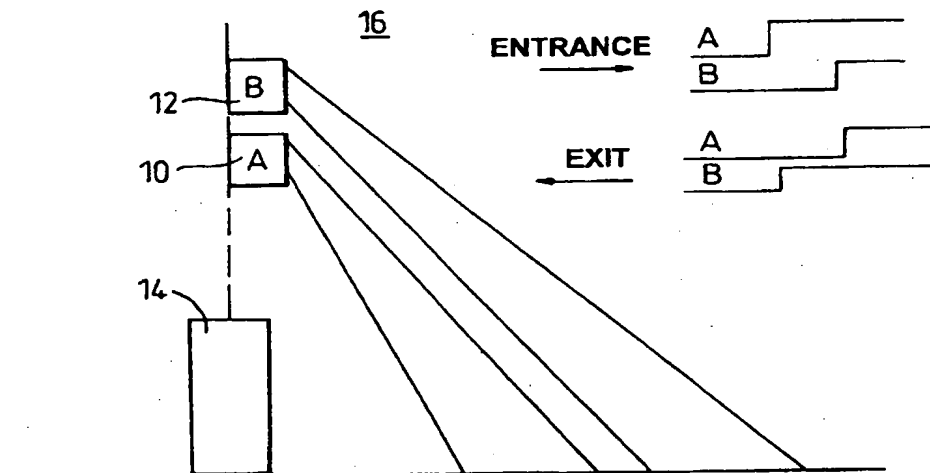


**Fig. 1**

GB 2 367 720 A

1/2

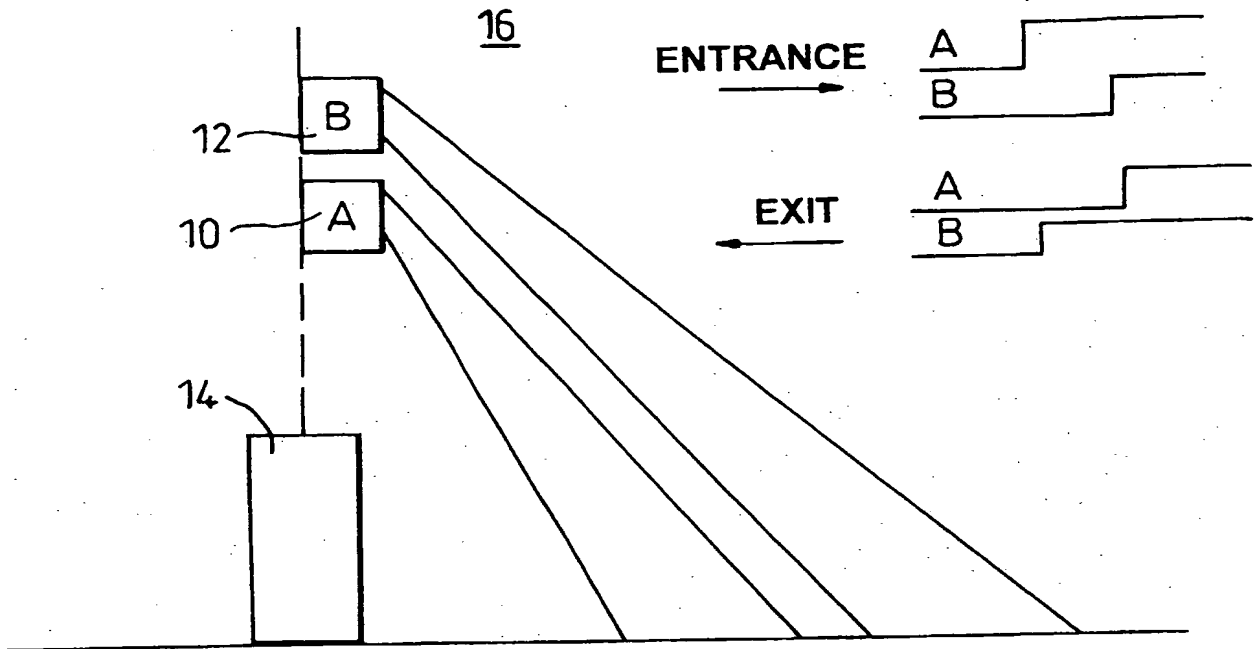


*Fig. 1*

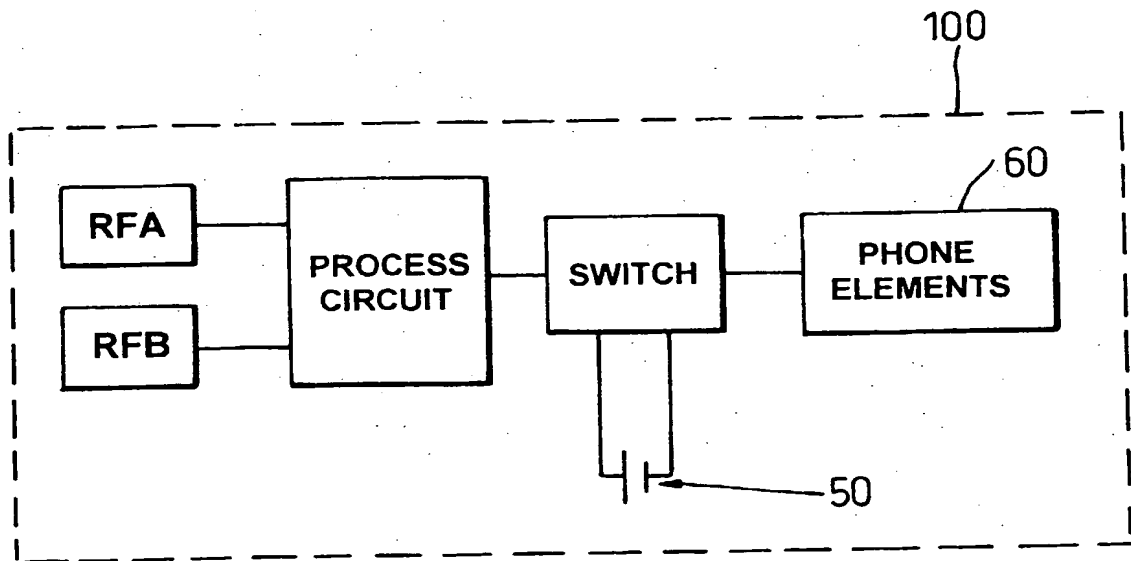

*Fig. 2*

2/2

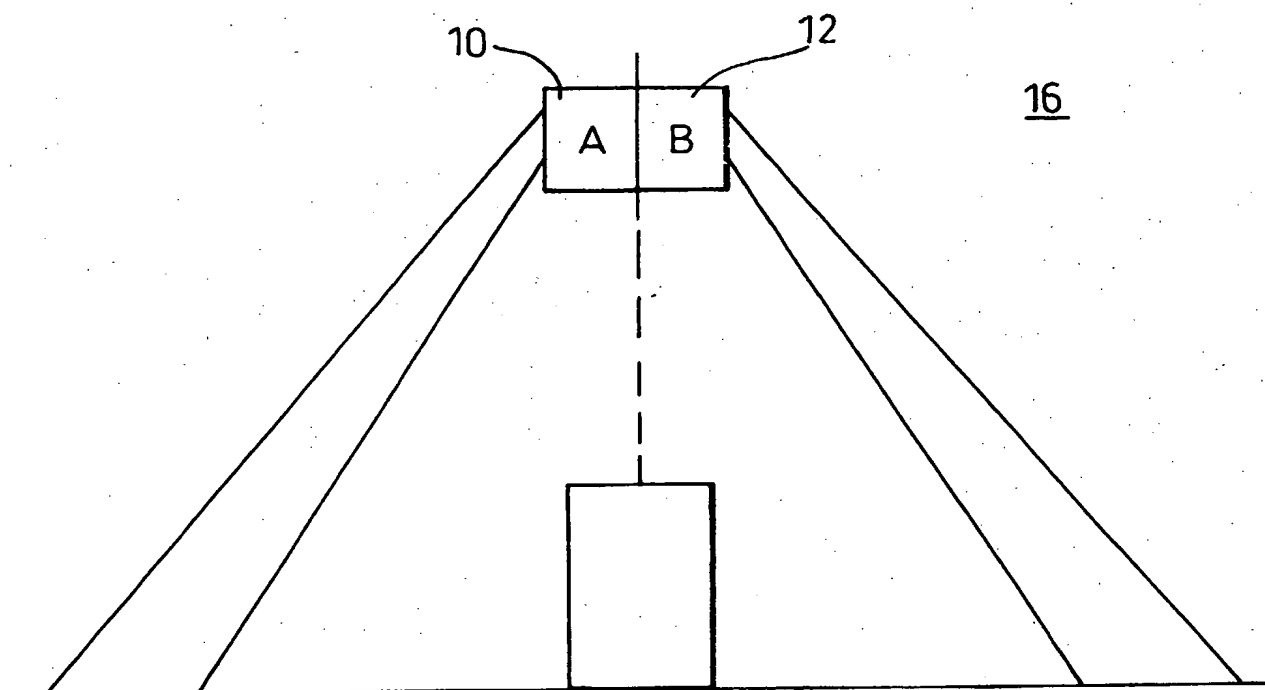

***Fig. 3***

**METHOD AND APPARATUS FOR DISABLING MOBILE TELEPHONES**

The present invention relates to the control of the use of mobile telephones in particular environments where it is considered to be undesirable for such telephones  
5 to operate.

The widespread use of mobile telephones has been accompanied by a corresponding level of frustration and anger on the part of certain sections of the population over the use of mobile phones in circumstances which are considered to be either intrusive,  
10 dangerous, or disrespectful. Examples of such circumstances are in a hospital or on an aeroplane, where the operation of the phone could interfere with critical electronic systems, or in theatres, cinemas, or on public transport, where the use of a phone is considered by many to be an intrusion. While some phone users do not appear to be concerned with the sentiments of others, many phone users are sensitive to such  
15 sentiments, and indeed share them, but may on occasions forget to switch their phone off upon entering what might be termed a "phone free" zone.

The present invention provides a system for disabling mobile phones in which the phone is automatically switched to a "standby" mode upon entering a phone  
20 controlled zone, thereby disabling the phone, and automatically switched from standby mode back to full operation upon leaving such a zone. According to a first aspect of the present invention, there is provided a method of disabling a mobile phone in a mobile phone controlled zone, comprising the steps of:

at an entrance to the zone, transmitting to the phone a first wireless signature  
25 signal;

in response to the first wireless signature signal, automatically switching the phone from a fully operational mode to a standby mode, in which the phone is receptive only to a second wireless signature signal;

at an exit to the zone transmitting to the phone the second wireless signature  
30 signal;

in response to the second wireless signature signal automatically switching the phone from standby back to a fully operational mode.

In one embodiment of the present invention, the wireless signal has a wavelength

which is only transmissible over short distances, thereby preventing overriding of the system by the reception of a second signature signal from a transmitter located remote from the phone controlled zone. Preferably the signal is a radio frequency signal in order to provide for the disabling of phones which are not in the line of sight with the transmitter(s) positioned at the entrances and exits of the controlled zone.

Given that the primary function of the wireless signature signals is to actuate operation of the phone upon entering and leaving the zone respectively, distinction between the first and second signature signals is only required by the handset when entering and leaving the zone. Thus the first and second signature signals could be provided by a pair of distinct rf signals (e.g. of differing frequency) and which are spaced apart in the direction of travel to and from the zone (typically by emission from two distinct rf beacons). The first signature signal would then be denoted by reception of the two signals in a first order (i.e. upon entering the zone), and the second signal by reception of the two signals in the opposite order to the first order (i.e. upon leaving the zone). This system has the advantage of simplicity. Alternatively, two spatially distinct beacons could be provided which emit absolutely unique signals, the one providing the disable signature being located inside the entrance to the zone, the other, which provides the enable signature being located outside the entrance.

A further aspect of the present invention provides an apparatus for disabling a mobile phone in a phone controlled zone comprising:

transmitting means located at an entrance to the zone, and transmitting a first wireless signature signal to disable the mobile phone into a standby state and a second wireless signature signal to actuate the mobile phone from a standby state to a fully operational state;

at least one receiver provided on the mobile phone for receiving the first and second signature signals; wherein

the phone further comprises a decoder which decodes the signature signals and actuates operation of the phone accordingly.

Embodiments of the present invention will now be described, by way of example, and with reference to the accompanying drawings, in which:

100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200

Fig. 1 is a schematic representation of the boundary of a phone controlled zone in accordance with an embodiment of the present invention;

5 Fig. 2 is a circuit diagram; and

Fig. 3 is a schematic representation of the boundary of a phone controlled zone in accordance with a further embodiment of the present invention.

10 Referring now to Fig. 1, a pair of radio frequency beacons 10, 12 are located above the entrance 14 to a mobile phone controlled zone 16, in which it is either desirable (e.g. for social reasons), or critical for safety reasons that mobile phones do not operate. The beacons 10, 12 output RF signals A, B respectively, and the frequency of the signals A, B is chosen so that it will be different to that of the normal operation  
15 of the mobile phone, and also so they will not interfere with any critical electronic systems, whose operation disabling of a mobile phone is designed to safeguard. In addition, the frequency of the signals is chosen so that the transmission of identical signals from a remote location (for the purpose of overcoming the disabling of the phone within the zone) is difficult to achieve. Typically the frequency of the signals  
20 A, B will be in the region of 2.402 – 2.480 GHz, which is the frequency used in the “bluetooth” system.

As can be seen from Fig. 1, upon entering the zone, a phone user, and therefore the user’s phone will pass first through the A signal beam, and then through the B signal  
25 beam. Upon leaving the zone, the phone will pass through the signal beams in reverse order, i.e. signal beam B followed by signal beam A. According to this embodiment of the invention, a mobile phone will be disabled to a standby mode by a disable signature, which in the present example has the form of signal A, followed a short time later by signal B, and enabled to full operation from standby mode by an enable  
30 signature, which in the present example has the form of a signal B followed a short time later by signal A.

Referring now additionally to Fig. 2, the phone 100 is provided with a pair of RF detection circuits RFA, RFB. Depending upon the nature of the RF output from the

beacons 10, 12, the circuits RFA, RFB may be responsive to a variety of different types of RF signal. In the present example, the circuits could be adapted to detect a particular digital output. In a modification the circuits could be analogue, and responsive to, for example, a particular distinct frequency; any output from analogue  
 5 detection circuits would need to be appropriately conditioned by the use of, *inter alia*, a suitable analogue to digital converter. The outputs of the detection circuits are passed to the inputs of a processing circuit 30, which is in turn connected to actuate a switch 40 that operates to supply power from a battery 50 to the known elements 60 of a the mobile phone 100 in order to enable normal operation thereof. The  
 10 processing circuit 30 and switch 40 function in the manner outlined above.

Specifically, in the event that an output is received from both detection circuits RFA, RFB, with the timing of the outputs indicating that the output of circuit RFA was activated shortly before the output of circuit RFB, this is indicative of the phone  
 passing first through signal beam A, and then through signal beam B, and is the  
 15 signature indicative of the phone is entering the controlled zone. The processing circuit 30 outputs a signal to the switch 40 causing it to cut power to the standard elements 60 of the phone (i.e. microwave transceiver etc.), thereby disabling the phone into a standby state, in which power is only supplied from the battery 50 to the detection circuits RFA, RFB, the processing circuit 30, and switch 40 (i.e those  
 20 elements whose operation is required in order to re-enable the phone). In the event that an output is received from both detection circuits RFA and RFB, with RFB being activated shortly before RFA, this is the signature indicative of the phone is passing out of the zone, and the processing circuitry 30 sends a signal to the switch 40 to cause it to supply power once again from the battery 50 to the phone elements.

25 Referring now to Fig. 3, in an alternative embodiment, beacon 10 is located outside of the controlled zone, and beacon 12 inside the zone. In this embodiment, the processing circuit 30 is adapted to switch the phone on from standby if signal A is detected, and to switch the phone off to standby if signal B is detected. In this  
 30 alternative, the processing circuit is configured to ignore signal A if the phone is already on, this being the likely situation when the phone is entering the controlled zone, and to ignore signal B if the phone is already off, this being the likely situation when the phone is leaving the controlled zone.

- The present invention as described above provides a system according to which a phone is disabled when entering a phone-controlled zone without the consent of the user. It is envisaged that such a system is useful for circumstances where the use of a mobile telephone could be dangerous, e.g. on an aircraft, or in an hospital. However,
- 5 it is equally possible to configure the system in such a manner that the disabling of a phone only takes place with the consent of the user. Alternatively, a combination of the two, in which disabling for safety considerations occurs without the consent of the user at one frequency and voluntary disabling at another.
- 10 It is not necessary to have two signals at differing frequencies to provide a signature signal; many other ways of producing appropriate distinct disabling and enabling signals may be used. For example the A and B beacons may emit distinct coded signals at the same carrier frequency.

## CLAIMS

1. A method of disabling and enabling a mobile phone in a mobile phone controlled zone, comprising the steps of:
  - 5 at an entrance to the zone, transmitting to the phone a first wireless signature signal;
  - in response to the first wireless signature signal, automatically switching the phone from a fully operational mode to a standby mode, in which the phone is receptive only to a second wireless signature signal;
  - 10 at an exit to the zone transmitting to the phone the second wireless signature signal;
  - in response to the second wireless signature signal automatically switching the phone from standby back to a fully operational mode.
- 15 2. A method according to claim 1 wherein the first and second wireless signature signals are provided by a pair of mutually distinct wireless signals.
3. A method according to claim 2 wherein the first signature signal is provided by receipt of each of said distinct wireless signals in a first order, and the second
  - 20 signature signal is provided by receipt of said distinct wireless signals in an order opposite to the first order.
4. A method according to claim 1 wherein the wireless signature signals are radio frequency signals.
- 25 5. A method according to claim 4 wherein the radio frequency signals have a frequency in excess of 2.4 GHz.
6. A method according to claim 2 wherein the mutually distinct signals have
  - 30 different frequencies
7. A method according to claim 2 wherein the mutually distinct signals are coded.
8. A system for enabling and disabling mobile phones in a phone controlled zone

comprising:

transmitting means located at an entrance to the zone, and transmitting a first wireless signature signal to disable the mobile phone into a standby state and a second wireless signature signal to actuate the mobile phone from a standby state to a fully

5 operational state;

receiving means provided on the mobile phone for receiving the first and second signature signals; wherein

the phone further comprises a decoder which decodes the signature signals and actuates operation of the phone accordingly.

10

9. A system according to claim 8 wherein the transmitting means transmits at least two mutually distinct wireless signals.

10. A system according to claim 9 wherein the first signature signal is provided by receipt by the phone of the two distinct signals in a first order, and the second signature signal is provided by receipt by the phone of the two distinct signals in a second order.

15



INVESTOR IN PEOPLE

Application No: GB 0024231.3  
Claims searched: 1- 7

8

Examiner: Hannah Sylvester  
Date of search: 2 July 2001

## Patents Act 1977 Search Report under Section 17

### Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): H4L (LDDDM)

Int Cl (Ed.7): H04Q 7/38, 7/22, 7/28, 7/30, 7/18, 7/32, 7/34, H04B 1/00, 1/38, 1/44, 7/26,  
H04M 1/00, 3/42, 3/50, G07C 9/00

Other: Online: WPI EPODOC JAPIO

### Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB2329794A (MOTOROLA)	At least: 1 and 4
A	GB2317302A (NEC)	
X	EP0880296A1 (NEC)	At least: 1, 2 and 4
X	DE19653845A1 (MAINITZ)	At least: 1, 2 and 4
X	JP2000287274A (TOSHIBA)	At least: 1 and 4
A	JP11007564A (TOYO)	
X	JP10174165A (NIPPON)	At least: 1 and 4

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.  
& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent document published on or after, but with priority date earlier than, the filing date of this application.

